

Exact Ergodic Capacity Analysis for Cognitive Underlay Amplify-and-Forward Relay Networks over Rayleigh Fading Channels

Vo Nguyen Quoc Bao and Vu Van San

Posts and Telecommunications Institute of Technology, Ho Chi Minh City, Vietnam

E-mail: baovnq@ptithcm.edu.vn, sanvv@ptit.edu.vn

Correspondence: Vo Nguyen Quoc Bao

Communication: received 20 August 2017, revised 1 September 2017, accepted 1 September 2017

Abstract: In this paper, we propose a novel derivation approach to obtain the exact closed form expression of ergodic capacity for cognitive underlay amplify-and-forward (AF) relay networks over Rayleigh fading channels. Simulation results are performed to verify the analysis results. Numerical results are provided to compare the system performance of cognitive underlay amplify-and-forward relay networks under both cases of AF and decode-and-forward (DF) confirming that the system with DF provides better performance as compared with that with AF.

Keywords: Ergodic capacity, Rayleigh fading channels, cognitive radio, underlay relay networks, amplify-and-forward, decode-and-forward.

I. INTRODUCTION

Cognitive radio has been widely considered as a promising technology for next generation mobile networks due to its superior spectral efficiency [1, 2]. There are three conventional spectrum sharing approaches including underlay, overlay, and interweave, where the underlay approach is often of interest in practical implementation. The key idea of the cognitive underlay approach is to allow unlicensed networks to transmit/receive data on the same frequency band licensed to primary (licensed) networks if their interference to the primary users is below a certain level.

An important issue in cognitive underlay networks that has attracted much attention recently is to guarantee the secondary network performance and coverage due to the constraint of the transmit powers for secondary networks, *i.e.*, the maximum allowable interference at the primary receiver [3]. As a result, many advantaged techniques for the physical layer are proposed for cognitive underlay networks, *e.g.*, see [4–11]. Although all above-mentioned research works have derived the system performance in terms of outage probability and ergodic capacity, the ergodic capacity is still expressed under asymptotic or upper-

bound expression due to the complicated form of the end-to-end signal-to-noise ratio (SNR) of dual-hop amplify-and-forward (AF) relaying [12]. As an alternative, ergodic capacity of underlay decode-and-forward (DF) systems is usually employed to estimate that of underlay AF systems at high SNR regime leading to the fact that we cannot understand the performance gap between AF and DF.

To the best knowledge of the authors, exact and general ergodic capacity analysis of cognitive underlay dual-hop relaying over Rayleigh fading channels remains an open problem. This paper is to fill this important gap, *i.e.*, providing the exact closed-form expression of the system ergodic capacity in terms of dilogarithm functions [13, 14]. All analytical results developed in this paper are corroborated by MATLAB-based simulation results, verifying the accuracy of the proposed derivation approach and the provided results. Numerical results are provided to investigate the effect of channel and system settings on the system ergodic capacity.

The main contributions of this paper are summarized as follows. First, we propose a novel approach to derive the exact closed form for system ergodic capacity over Rayleigh fading channels. Second, we compare the performance of cognitive underlay dual-hop relaying networks in terms of ergodic capacity under amplify-and-forward and decode-and-forward.

It should be noted that the proposed approach is not only applicable for Rayleigh fading channels but also for other generalized fading channels, *i.e.*, Nakagami- m and Rician.

The rest of this paper is organized as follows. In Section II, we introduce the model under study and describe the proposed protocol. Section III shows the formulas allowing evaluation of the system ergodic capacity over Rayleigh fading channels. In Section IV, we compare simulation and theoretical results. The paper is concluded in Section V.

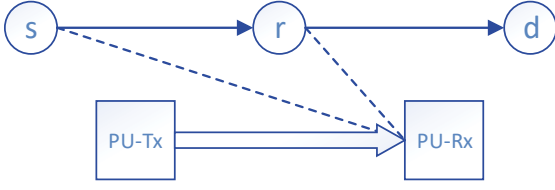


Figure 1. Cognitive underlay AF relay network.

II. SYSTEM MODEL

We consider a cognitive underlay dual hop relaying system with single amplify-and-forward relay, which is illustrated in Figure 1. Assuming no direct link existed, the communication between the source (s) and the destination (d) is performed with the help of the relay (r) via a time-division multiple access. In particular, the source broadcast its signal in the first time slot with transmit power P_s , which is received by the relay. After amplifying with the variable gain, the scaled signal is forwarded to the destination with transmit power P_r .

Denote h_{sp} and h_{rp} as the channel coefficients of the link from the source and the relay to the primary node, respectively, the transmit powers for the source and the relay under underlay mode of cognitive networks can be set as follows [15]:

$$P_s = \frac{I_p}{|h_{sp}|^2}, \quad (1)$$

$$P_r = \frac{I_p}{|h_{rp}|^2}, \quad (2)$$

where I_p denotes the interference temperature constraint at the primary receiver (PU-Rx).

The instantaneous signal-to-noise ratios (SNRs) of the first and second hops are respectively given by

$$\gamma_1 = \frac{I_p}{N_0} \frac{|h_{sr}|^2}{|h_{sp}|^2}, \quad (3)$$

$$\gamma_2 = \frac{I_p}{N_0} \frac{|h_{rd}|^2}{|h_{rp}|^2}, \quad (4)$$

where h_{sp} and h_{rp} are the channel coefficients of the link from $s \rightarrow r$ and $r \rightarrow d$, respectively. Here, we denote N_0 as the additive Gaussian white noise power. Under Rayleigh fading channels, $h_{\mathcal{A}\mathcal{B}}$ with $\mathcal{A} \in \{s, r\}$ and $\mathcal{B} \in \{p, r, d\}$ is a complex Gaussian random variable, so the channel power $|h_{\mathcal{A}\mathcal{B}}|^2$ is an exponential distributed random variable with expected value $\lambda_{\mathcal{A}\mathcal{B}} = \mathbb{E}\{|h_{\mathcal{A}\mathcal{B}}|^2\}$ with $\mathbb{E}\{\cdot\}$ being the expectation operator. Assuming that the path loss effect is taken into account, we have $\lambda_{\mathcal{A}\mathcal{B}} = d_{\mathcal{A}\mathcal{B}}^{-\eta}$, where η and $d_{\mathcal{A}\mathcal{B}}$ denote the path-loss exponent and the distance between node $\mathcal{A}$ and node $\mathcal{B}$, respectively [16].

In dual-hop relaying networks with non-regenerative variable gain relays, the instantaneous Channel State Information (CSI) of the first hop is utilized to ensure the fixed power at the output of the relay. Accordingly, the effective SNR received at d can be expressed as [17]

$$\gamma_{AF} = \frac{\gamma_1 \gamma_2}{\gamma_1 + \gamma_2 + 1}. \quad (5)$$

III. CAPACITY ANALYSIS

1. Amplify-and-Forward

Throughout the paper, we assume that the data channel is unknown at the transmitter but perfectly known at the receiver. Considered as an important metric in designing wireless networks, ergodic capacity reveals the upper bound on the amount of information, which can be reliably transmitted over noisy wireless channels with a certain probability of error. It is well-known that if the probability density function (PDF) of the end-to-end SNR is available, the ergodic capacity (in bits/second) per unit bandwidth can be calculated by evaluating the following integral, which is of the form

$$\begin{aligned} C_{AF} &= \frac{1}{2} \mathbb{E}_{\gamma_{AF}} \{\log(1 + \gamma_{AF})\} \\ &= \frac{1}{2} \int_0^\infty \log(1 + \gamma) f_{\gamma_{AF}}(\gamma) d\gamma, \end{aligned} \quad (6)$$

where the pre-factor 1/2 is included to reflect the fact that the source-destination communication occurs in two orthogonal time slots. However, with the current form of γ_{AF} in (5), finding an exact closed-form evaluation of (6) is a challenging mathematical problem due to the complexity of statistical distribution of γ_{AF} along with the presence of the nonlinear log function.

To deal with such problem, (6) should be expressed in a more mathematically tractable form. To achieve this, the basic properties of the log function is employed after a some manipulations, yielding

$$\begin{aligned} C_{AF} &= \frac{1}{2 \ln 2} \mathbb{E}_{\gamma_{AF}} \left[\ln \left(1 + \frac{\gamma_1 \gamma_2}{\gamma_1 + \gamma_2 + 1} \right) \right] \\ &= \frac{1}{2 \ln 2} \underbrace{\mathbb{E}_{\gamma_1} [\ln(1 + \gamma_1)]}_{C_1} \\ &\quad + \frac{1}{2 \ln 2} \underbrace{\mathbb{E}_{\gamma_2} [\ln(1 + \gamma_2)]}_{C_2} \\ &\quad - \frac{1}{2 \ln 2} \underbrace{\mathbb{E}_{\gamma_1 + \gamma_2} [\ln(1 + \gamma_1 + \gamma_2)]}_{C_3}. \end{aligned} \quad (7)$$

Theorem 1: The exact closed-form expression of ergodic capacity of cognitive underlay AF networks over Rayleigh fading channels is

$$C_{AF} = \frac{1}{2 \ln 2} \left[\frac{\alpha_1 \ln \alpha_1}{\alpha_1 - 1} + \frac{\alpha_2 \ln \alpha_2}{\alpha_2 - 1} - \frac{(\alpha_1 + \alpha_2) \ln (\alpha_1 + \alpha_2)}{\alpha_1 + \alpha_2 - 1} \right] + \frac{\alpha_1 \alpha_2 \log(\alpha_1 \alpha_2)}{2 \ln 2 (\alpha_1 + \alpha_2) (\alpha_1 + \alpha_2 - 1)^2} \times [1 - (\alpha_1 + \alpha_2) + (\alpha_1 + \alpha_2) \ln(\alpha_1 + \alpha_2)] - \frac{\alpha_1 \alpha_2 [\log(1 + \alpha_1) + \log(1 + \alpha_2)]}{2 \ln 2 (1 - \alpha_1 - \alpha_2) (\alpha_1 + \alpha_2)} - \frac{\alpha_1 \alpha_2 [\mathcal{K}(\alpha_1, \alpha_2) + \mathcal{K}(\alpha_2, \alpha_1)]}{2 \ln 2 (1 - \alpha_1 - \alpha_2)^2}, \quad (8)$$

where $\mathcal{K}(\alpha_1, \alpha_2)$ is given in (9) shown at the top of the next page with $\text{Li}_2(z) = \int_0^z \frac{\log(1-t)dt}{t}$ denoting the dilogarithm function [18, Eq. 27.7.1].

Proof: To derive (1), we need to know the PDFs of γ_1 , γ_2 , and $\gamma_1 + \gamma_2$. For γ_1 and γ_2 , recalling the results in [19], their PDFs can be given by

$$f_{\gamma_i}(\gamma) = \frac{\alpha_i}{(\gamma + \alpha_i)^2}, \quad (10)$$

where $\alpha_1 = \frac{I_p}{N_0} \frac{\lambda_{sr}}{\lambda_{sp}}$ and $\alpha_2 = \frac{I_p}{N_0} \frac{\lambda_{rd}}{\lambda_{rp}}$.

For $\gamma_1 + \gamma_2$, since the moment generating function (MGF) approach [20]¹, could not be used due to its high derivation complexity, we start from the definition of the cumulative distribution function (CDF) of $\gamma_1 + \gamma_2$ and invoke the concept of conditional probability, namely

$$F_{\gamma_1 + \gamma_2}(\gamma) = \Pr(\gamma_1 + \gamma_2 < \gamma) = \int_0^\gamma F_{\gamma_1}(\gamma - x) f_{\gamma_2}(x) dx. \quad (11)$$

In (11), $F_{\gamma_i}(\cdot)$ is the CDF of γ_i , which is obtained by integrating (10) from 0 to γ as follows:

$$F_{\gamma_i}(\gamma) = \frac{\gamma}{\gamma + \alpha_i}. \quad (12)$$

Substituting (12) and (10) into (11), after some manipulations, we have

$$F_{\gamma_1 + \gamma_2}(\gamma) = \frac{\gamma}{\gamma + \alpha_1 + \alpha_2} + \frac{\alpha_1 \alpha_2}{(\gamma + \alpha_1 + \alpha_2)^2} \left[\log \frac{\alpha_1}{\gamma + \alpha_1} + \log \frac{\alpha_2}{\gamma + \alpha_2} \right]. \quad (13)$$

¹The PDF can be yielded by taking the inverse Laplace transform of the MGF of $\gamma_1 + \gamma_2$, which can be obtained as the product of the MGF of its summands.

Employing the relationship between the PDF and the CDF, we can obtain the PDF of $\gamma_1 + \gamma_2$ as

$$f_{\gamma_1 + \gamma_2}(\gamma) = \frac{\alpha_1 + \alpha_2}{(\gamma + \alpha_1 + \alpha_2)^2} - \frac{2\alpha_1 \alpha_2 \log(\alpha_1 \alpha_2)}{(\gamma + \alpha_1 + \alpha_2)^3} - \frac{\alpha_1 \alpha_2}{(\gamma + \alpha_1 + \alpha_2)^2} \left(\frac{1}{\gamma + \alpha_1} + \frac{1}{\gamma + \alpha_2} \right) + \frac{2\alpha_1 \alpha_2}{(\gamma + \alpha_1 + \alpha_2)^3} [\log(\gamma + \alpha_1) + \log(\gamma + \alpha_2)]. \quad (14)$$

Having the PDFs of γ_1 , γ_2 and $\gamma_1 + \gamma_2$ in hands allows us to derive C_1 , C_2 and C_3 . We easily recognize that C_1 and C_2 take the general form, which is written as

$$\mathcal{J}(a) = \int_0^\infty \ln(1 + \gamma) \frac{a}{(\gamma + a)^2} d\gamma. \quad (15)$$

With the help of the identity [18, Eq. (4.291.17)], we have

$$\mathcal{J}(a) = \begin{cases} \frac{a \ln a}{a - 1}, & a \neq 1 \\ 1, & a = 1 \end{cases}. \quad (16)$$

We are now in a position to derive C_3 . Rewriting C_3 in an explicit form, we obtain

$$C_3 = \int_0^\infty \ln(1 + \gamma) f_{\gamma_1 + \gamma_2}(\gamma) d\gamma = (\alpha_1 + \alpha_2) \underbrace{\int_0^\infty \frac{\ln(1 + \gamma)}{(\gamma + \alpha_1 + \alpha_2)^2} d\gamma}_{\mathcal{I}_1} - 2\alpha_1 \alpha_2 \log(\alpha_1 \alpha_2) \underbrace{\int_0^\infty \frac{\ln(1 + \gamma)}{(\gamma + \alpha_1 + \alpha_2)^3} d\gamma}_{\mathcal{I}_2} - \alpha_1 \alpha_2 \int_0^\infty \frac{\ln(1 + \gamma)}{(\gamma + \alpha_1 + \alpha_2)^2} \left(\frac{1}{\gamma + \alpha_1} + \frac{1}{\gamma + \alpha_2} \right) d\gamma + 2\alpha_1 \alpha_2 \underbrace{\int_0^\infty \frac{\ln(1 + \gamma) [\log(\gamma + \alpha_1) + \log(\gamma + \alpha_2)]}{(\gamma + \alpha_1 + \alpha_2)^3} d\gamma}_{\mathcal{I}_3}, \quad (17)$$

where $\mathcal{I}_i$ with $i = 1, 2, 3$ are auxiliary functions, which are derived next.

Starting with $\mathcal{I}_1$ and using the identity [18, Eq. (4.291.17)], we have

$$\mathcal{I}_1 = \begin{cases} \frac{\ln(\alpha_1 + \alpha_2)}{\alpha_1 + \alpha_2 - 1}, & \alpha_1 + \alpha_2 \neq 1 \\ 1, & \alpha_1 + \alpha_2 = 1 \end{cases}. \quad (18)$$

$$\mathcal{K}(\alpha_1, \alpha_2) = \begin{cases} -\frac{\ln^2(1-\alpha_1)}{2} + \frac{\ln^2\alpha_2}{2} + \ln\alpha_1 \ln\left[\frac{(1-\alpha_1)(\alpha_1+\alpha_2)}{\alpha_2}\right] - \text{Li}_2\left(\frac{\alpha_1}{\alpha_1-1}\right) + \text{Li}_2\left(-\frac{\alpha_1}{\alpha_2}\right), & \alpha_1 < 1 \\ \frac{\pi^2}{6} + \frac{\ln^2\alpha_2}{2} + \text{Li}_2\left(-\frac{1}{\alpha_2}\right), & \alpha_1 = 1 \\ \frac{\pi^2}{2} - \frac{\ln^2(\alpha_1-1)}{2} + \frac{\ln^2\alpha_2}{2} + \ln\alpha_1 \ln\left[\frac{(\alpha_1-1)(\alpha_1+\alpha_2)}{\alpha_2}\right] - \Re\left\{\text{Li}_2\left(\frac{\alpha_1}{\alpha_1-1}\right)\right\} + \text{Li}_2\left(-\frac{\alpha_1}{\alpha_2}\right), & \alpha_1 > 1 \end{cases} \quad (9)$$

To solve $\mathcal{I}_2$, based on integration by parts, we obtain

$$\begin{aligned} \mathcal{I}_2 &= -\frac{\ln(1+\gamma)}{2(\gamma+\alpha_1+\alpha_2)^2} \Big|_{\gamma=0}^{\infty} + \frac{1}{2} \int_0^{\infty} \frac{d\gamma}{(\gamma+1)(\gamma+\alpha_1+\alpha_2)^2} \\ &= \begin{cases} \frac{1-(\alpha_1+\alpha_2)+(\alpha_1+\alpha_2)\ln(\alpha_1+\alpha_2)}{2(\alpha_1+\alpha_2)(\alpha_1+\alpha_2-1)^2}, & \alpha_1+\alpha_2 \neq 1, \\ \frac{1}{4}, & \alpha_1+\alpha_2 = 1. \end{cases} \end{aligned} \quad (19)$$

Using integration by parts again, $\mathcal{I}_3$ is re-expressed as

$$\begin{aligned} \mathcal{I}_3 &= -\underbrace{\frac{\ln(1+\gamma)[\log(\gamma+\alpha_1)+\log(\gamma+\alpha_2)]}{2(\gamma+\alpha_1+\alpha_2)^2}}_{\rightarrow 0} \Big|_{\gamma=0}^{\infty} \\ &\quad + \frac{1}{2} \int_0^{\infty} \frac{\ln(1+\gamma)}{(\gamma+\alpha_1+\alpha_2)^2} \left[\frac{1}{\gamma+\alpha_1} + \frac{1}{\gamma+\alpha_2} \right] d\gamma \\ &\quad + \frac{1}{2} \underbrace{\int_0^{\infty} \frac{\log(\gamma+\alpha_1)+\log(\gamma+\alpha_2)}{(1+\gamma)(\gamma+\alpha_1+\alpha_2)^2} d\gamma}_{\mathcal{I}_4}. \end{aligned} \quad (20)$$

Plugging (20) into (17) and then canceling the like terms, C_3 is simplified as

$$C_3 = (\alpha_1 + \alpha_2)\mathcal{I}_1 - 2\alpha_1\alpha_2 \log(\alpha_1\alpha_2)\mathcal{I}_2 + \alpha_1\alpha_2\mathcal{I}_4. \quad (21)$$

For $\mathcal{I}_4$, by employing partial fraction decomposition, we have

$$\begin{aligned} \mathcal{I}_4 &= \frac{1}{1-\alpha_1-\alpha_2} \int_0^{\infty} \frac{\log(\gamma+\alpha_1)+\log(\gamma+\alpha_2)}{(\gamma+\alpha_1+\alpha_2)^2} d\gamma \\ &\quad + \frac{1}{(1-\alpha_1-\alpha_2)^2} \underbrace{\int_0^{\infty} \left(\frac{\log(\gamma+\alpha_1)}{\gamma+1} - \frac{\log(\gamma+\alpha_1)}{\gamma+\alpha_1+\alpha_2} \right) d\gamma}_{\mathcal{K}(\alpha_1, \alpha_2)} \\ &\quad + \frac{1}{(1-\alpha_1-\alpha_2)^2} \underbrace{\int_0^{\infty} \left(\frac{\log(\gamma+\alpha_2)}{\gamma+1} - \frac{\log(\gamma+\alpha_2)}{\gamma+\alpha_1+\alpha_2} \right) d\gamma}_{\mathcal{K}(\alpha_2, \alpha_1)}. \end{aligned} \quad (22)$$

In (22), we can see that the second and third integrals take from the general form, given as follows:

$$\mathcal{K}(a, b) = \int_0^{\infty} \left(\frac{\log(\gamma+a)}{\gamma+1} - \frac{\log(\gamma+a)}{\gamma+a+b} \right) d\gamma. \quad (23)$$

By recognizing the integral representation of the dilogarithm function [21, Eq. (27.7.1)], i.e., $\text{Li}_2(-x) = \int_1^x \ln t/(t-1)dt$, after several manipulations, we find out that $\mathcal{K}(a, b)$ can be derived as shown in (24) at the top of the next page. Furthermore, making use of the fact that $\Im\{\text{Li}_2[a/(a-1)]\} = 2\pi \arccot(1-2a)$ for $a > 1$, (24) can be rewritten as (9), where $\Re(\cdot)$ and $\Im(\cdot)$ represent the real and imaginary parts of a complex number, respectively.

For the case of $\alpha_1 + \alpha_2 = 1$, it is straightforward to derive

$$\begin{aligned} \mathcal{K}(a, b) &= \int_0^{\infty} \frac{\log(\gamma+\alpha_1)+\log(\gamma+\alpha_2)}{(1+\gamma)^3} d\gamma \\ &= \frac{\alpha_1-1+(\alpha_1-2)\alpha_1 \log \alpha_1}{2(\alpha_1-1)^2} \\ &\quad + \frac{\alpha_2-1+(\alpha_2-2)\alpha_2 \log \alpha_2}{2(\alpha_2-1)^2}. \end{aligned} \quad (25)$$

□

Pulling everything together, i.e., (6), (16), and (17), we can obtain the exact closed-form expression for C_{AF} . It should be noted that the dilogarithm function is available as a built-in function in most well-known mathematical software tools such as MATLAB and MATHEMATICA. Besides, there exist efficient approaches to directly calculate the dilogarithm, e.g., see [13, 14].

2. Amplify-and-Forward versus Decode-and-Forward

In this section, we provide the ergodic capacity for dual hop DF networks, which are considered as a counterpart of AF networks. The ergodic capacity of the underlay DF networks is defined as

$$C_{DF} = \frac{1}{2} \int_0^{\infty} \log_2(1+\gamma) f_{\gamma_{DF}}(\gamma) d\gamma, \quad (26)$$

where γ_{DF} is the equivalent end-to-end SNR of the system.

It is well-known that the exact form of γ_{DF} in terms of γ_1 and γ_2 is not mathematically visible. To proceed further, we adopt the mathematical tractability approximation approach suggested by Wang *et al.* [22]. In particular, the equivalent end-to-end SNR of re-generative relaying systems, γ_{DF} , can be tightly approximated irrespective of the employed modulation scheme as

$$\gamma_{DF} = \min(\gamma_1, \gamma_2). \quad (27)$$

$$\mathcal{K}(a, b) = \begin{cases} -\frac{\ln^2(1-a)}{2} + \frac{\ln^2 b}{2} + \ln a \ln \left[\frac{(a-1)(a+b)}{b} \right] - \text{Li}_2\left(\frac{a}{a-1}\right) + \text{Li}_2\left(-\frac{a}{b}\right), & a < 1 \\ \frac{\pi^2}{6} + \frac{\ln^2 b}{2} + \text{Li}_2\left(-\frac{1}{b}\right), & a = 1 \\ \frac{\pi^2}{2} + 2i\pi \arccot(1-2a) - \ln^2(a-1) + \ln^2 b - 2 \ln a \ln \left[\frac{b}{(a-1)(a+b)} \right] - \text{Li}_2\left(\frac{a}{a-1}\right) + \text{Li}_2\left(-\frac{a}{b}\right), & a > 1 \end{cases} \quad (24)$$

The PDF of γ_{DF} is given by

$$\begin{aligned} f_{\gamma_{\text{DF}}}(\gamma) &= \frac{d}{d\gamma} \left[1 - (1 - F_{\gamma_1}(\gamma))(1 - F_{\gamma_2}(\gamma)) \right] \\ &= \frac{\alpha_1 \alpha_2}{(\gamma + \alpha_1)(\gamma + \alpha_2)^2} + \frac{\alpha_1 \alpha_2}{(\gamma + \alpha_2)(\gamma + \alpha_1)^2} \\ &\stackrel{(a)}{=} \frac{\alpha_1 \alpha_2}{\alpha_2 - \alpha_1} \left[\frac{1}{(\gamma + \alpha_1)^2} - \frac{1}{(\gamma + \alpha_2)^2} \right], \end{aligned} \quad (28)$$

where (a) immediately follows after using partial fraction technique with some simple manipulations.

Theorem 2: The ergodic capacity of cognitive underlay DF relay networks is tightly approximated by

$$C_{\text{DF}} = \frac{\alpha_1 \alpha_2}{2 \ln 2 (\alpha_2 - \alpha_1)} \left(\frac{\log \alpha_1}{\alpha_1 - 1} - \frac{\log \alpha_2}{\alpha_2 - 1} \right). \quad (29)$$

Proof: Plugging (28) into (26) and taking the integral, we have (after simplification steps).

For $\alpha_1 = \alpha_2 = \alpha$, C_{DF} is simplified as

$$C_{\text{DF}} = \begin{cases} \frac{\alpha(1 - \alpha + \alpha \log \alpha)}{2 \ln 2 (\alpha - 1)^2}, & \alpha \neq 1 \\ \frac{1}{2 \ln 2}, & \alpha = 1 \end{cases} \quad (30)$$

□

Having C_{AF} and C_{DF} in hands allows us to numerically evaluate the system ergodic capacity for a given network and channel condition.

IV. NUMERICAL RESULTS AND DISCUSSION

This section is to verify the proposed derivation approach and to study effects of the system and channel settings on the system ergodic capacity. We consider the two-dimensional system model, where the source, the relay, the destinations, and the primary receiver are placed at coordinate (0,0), ($d, 0$), (1,0), and (x_p, y_p), respectively. Recalling that here we adopt the simplified path loss model, we can model $\lambda_{\mathcal{AB}} = d_{\mathcal{AB}}^{-\eta}$, where $d_{\mathcal{AB}}$ denotes the distance between node $\mathcal{A}$ and node $\mathcal{B}$, and η is the path-loss exponent.

In Figure 2, we plot the system ergodic capacity versus average SNRs in dB for three different cases of the primary user location: (i) Case A: (0.3, 0.3), (ii) Case B: (0.6, 0.6), and (iii) Case C: (0.9, 0.9). It can be seen that the simulation results are in excellent alignment with the

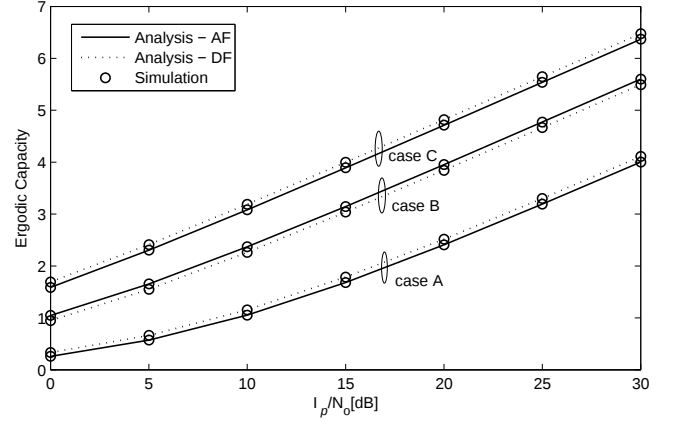


Figure 2. Ergodic capacity versus average SNRs.

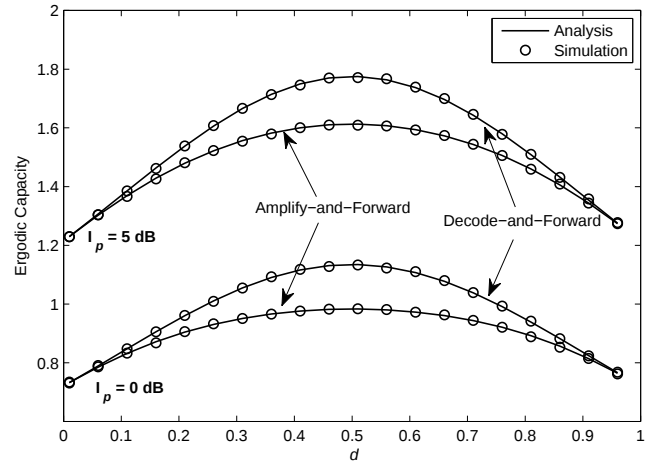


Figure 3. Effect of relay locations on the system ergodic capacity.

analysis results for both cases of AF and DF, confirming the correctness of the proposed derivation approach. We also see that case A outperforms case B, which, in turns, outperforms case C suggesting that the system capacity can improve when the secondary networks are located far away from the primary receivers, as expected. For the same channel and system settings, the system using AF provides better capacity as compared with that using DF. It can be explained by considering the fact that DF can eliminate noise when making right decoding, while AF amplifies the noise when forwarding.

In Figure 3, we investigate the effect of secondary

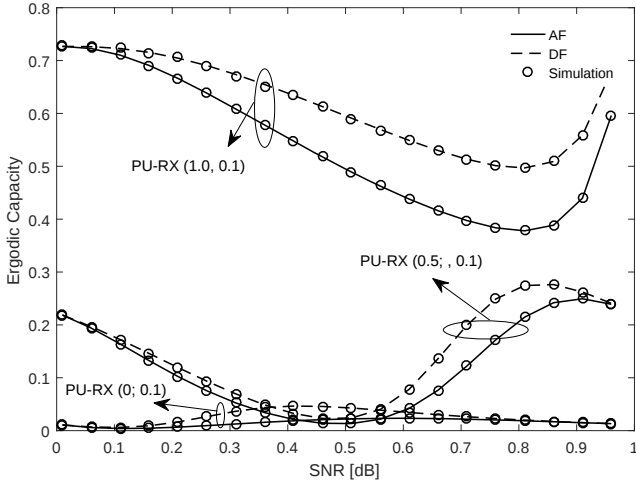


Figure 4. Effect of relay locations on the system ergodic capacity.

relay position on the system ergodic capacity for a fixed coordinate of the primary receiver. We can see that the best location for secondary relays is a complicated function of I_p and used relaying technique.

In Figure 4, we investigate the effect of the location of the primary receiver on the system performance. We consider three extreme cases for the primary receiver, i.e., very close to the secondary source, very close to the secondary relay, and very close to the secondary destination. Among three cases, the last case provides the best performance while the first case gives the worst performance. It can be explained by the fact that the primary receiver locations in relation to the secondary transmitter significantly affect the secondary system performance.

V. CONCLUSION

This paper has proposed a novel derivation approach to study the performance of cognitive underlay amplify-and-forward relay networks. In addition, our approach is applicable for other fading channel models. From the obtained results, we can conclude that DF should be used at high SNR regime to provide high system capacity as compared with AF.

ACKNOWLEDGMENTS

This research was financed by the Vietnam National Foundation for Science and Technology Development (NAFOSTED) (No. 102.01-2014.32).

REFERENCES

- [1] I. Mitola, J. and J. Maguire, G. Q., "Cognitive radio: making software radios more personal," *IEEE Personal Communications*, vol. 6, no. 4, pp. 13–18, 1999.
- [2] C. Cordeiro, K. Challapali, D. Birru, and N. Sai Shankar, "IEEE 802.22: the first worldwide wireless standard based on cognitive radios," in *Proceedings of the First IEEE International Symposium on New Frontiers in Dynamic Spectrum Access Networks (DySPAN 2005)*, 2005, pp. 328–337.
- [3] H. Jun-pyo, H. Bi, B. Tae Won, and C. Wan, "On the cooperative diversity gain in underlay cognitive radio systems," *IEEE Transactions on Communications*, vol. 60, no. 1, pp. 209–219, 2012.
- [4] T. Q. Duong, V. N. Q. Bao, and H.-J. Zepernick, "Exact outage probability of cognitive af relaying with underlay spectrum sharing," *Electronics letters*, vol. 47, no. 17, pp. 1001–1002, 2011.
- [5] V. N. Q. Bao and D. Q. Trung, "Exact outage probability of cognitive underlay df relay networks with best relay selection," *IEICE Transactions on communications*, 2012.
- [6] V. N. Q. Bao, T. Duong, and C. Tellambura, "On the performance of cognitive underlay multihop networks with imperfect channel state information," *IEEE Transactions on Communications*, vol. PP, no. 99, pp. 1–10, 2013.
- [7] N. H. Giang, V. N. Q. Bao, and H. Nguyen-Le, "Effect of CSI imperfection on cognitive underlay transmission over nakagami-m fading channel," *Journal of Science and Technology: Issue on Information and Communications Technology*, vol. 1, pp. 59–66, 2015.
- [8] S. Peng, X. Yang, S. Shu, and X. Cao, "Partial relay-based cooperative primary user detection in cognitive radio networks," *EURASIP Journal on Wireless Communications and Networking*, vol. 2017, no. 1, p. 94, 2017.
- [9] Y. Huang, Z. Li, R. Zhu, Y. Wang, and X. Chen, "Performance of selective cooperation for underlay cognitive radio with multiple primary transmitters and receivers," *IET Communications*, vol. 11, no. 9, pp. 1527–1534, 2017.
- [10] M. Hanif, H. C. Yang, and M. S. Alouini, "Transmit antenna selection for power adaptive underlay cognitive radio with instantaneous interference constraint," *IEEE Transactions on Communications*, 2017.
- [11] C. Xu, M. Zheng, W. Liang, H. Yu, and Y. C. Liang, "Outage performance of underlay multihop cognitive relay networks with energy harvesting," *IEEE Communications Letters*, vol. 20, no. 6, pp. 1148–1151, 2016.
- [12] M. O. Hasna and M. S. Alouini, "Harmonic mean and end-to-end performance of transmission systems with relays," *IEEE Transactions on Communications*, vol. 52, no. 1, pp. 130–135, 2004.
- [13] M. Hata, "Rational approximations to the dilogarithm," *Transactions of the American Mathematical Society*, vol. 336, no. 1, pp. 363–387, 1993.
- [14] M. Hassani, "Approximation of the dilogarithm function," *J. Inequalities in Pure and Applied Mathematics*, vol. 8, pp. 1–7, 2007.
- [15] B. Tae Won, C. Wan, J. Bang Chul, and S. Dan Keun, "Multi-user diversity in a spectrum sharing system," *IEEE Transactions on Wireless Communications*, vol. 8, no. 1, pp. 102–106, 2009.
- [16] G. L. Stuber, *Principles of mobile communication*, 2nd ed. Boston: Kluwer Academic, 2001.
- [17] J. N. Laneman, D. N. C. Tse, and G. W. Wornell, "Cooperative diversity in wireless networks: Efficient protocols and outage behavior," *IEEE Transactions on Information theory*, vol. 50, no. 12, pp. 3062–3080, 2004.
- [18] I. S. Gradshteyn, I. M. Ryzhik, A. Jeffrey, and D. Zwillinger, *Table of integrals, series and products*, 7th ed. Amsterdam; Boston: Elsevier, 2007.
- [19] V. N. Q. Bao and D. H. Bac, "A unified framework for performance analysis of df cognitive relay networks under interference constraints," in *Proceedings of the International*

- Conference on ICT Convergence*, 2011, pp. 537 – 542.
- [20] M. K. Simon and M.-S. Alouini, “A unified approach to the performance analysis of digital communication over generalized fading channels,” *Proceedings of the IEEE*, vol. 86, no. 9, pp. 1860–1877, 1998.
- [21] M. Abramowitz and I. A. Stegun, *Handbook of mathematical functions with formulas, graphs, and mathematical tables*, 10th ed. Washington: U.S. Govt. Print. Off., 1972.
- [22] T. Wang, R. Wang, and G. B. Giannakis, “Smart regenerative relays for link-adaptive cooperative communications,” in *Proceedings of the 40th Annual Conference on Information Sciences and Systems*, 2006, pp. 1038–1043.



Vo Nguyen Quoc Bao (SMIEEE) is an associate professor of Wireless Communications at Posts and Telecommunications Institute of Technology (PTIT), Vietnam. He is serving as the Dean of Faculty of Telecommunications and a Director of the Wireless Communication Laboratory (WCOMM). His research interests include wireless communications and information theory with current emphasis on MIMO systems, cooperative and cognitive communications, physical layer security, and energy harvesting. He has published more than 150 journal and conference articles that have 1700+ citations and H-index of 22. He is the Technical Editor in Chief of REV Journal on Electronics and Communications. He is also serving as an Associate Editor of EURASIP Journal on

Wireless Communications and Networking, an Editor of Transactions on Emerging Telecommunications Technologies (Wiley ETT), and VNU Journal of Computer Science and Communication Engineering. He served as a Technical Program co-chair for ATC (2013, 2014), NAFOSTED-NICS (2014, 2015, 2016), REV-ECIT 2015, ComManTel (2014, 2015), and SigComTel 2017. He is a Member of the Executive Board of the Radio-Electronics Association of Vietnam (REV) and the Electronics Information and Communications Association Ho Chi Minh City (EIC). He is currently serving as a scientific secretary of the Vietnam National Foundation for Science and Technology Development (NAFOSTED) scientific Committee in Information Technology and Computer Science (2014-2016).



Vu Van San received Ph.D. degree in 2000. In 1983, he joined in the Research Institute of Posts and Telecommunications (RIPT). He is now working at Posts and Telecommunications Institute of Technology (PTIT). His research interests are in the areas of high-speed optical communications, access networks, and digital transmission systems, wireless communications systems and signal processing. He is currently the Editor in Chief of Journal of Science and Technology on Information and Communications. He is also serving as a member of science and technology committee of the Ministry of Information and Communications.